

RINOL CONDUCTIVE PU


ELECTRICALLY CONDUCTIVE COATING SYSTEM



1. System description

RINOL CONDUCTIVE PU is a five-layer, polyurethane system that ensures safe electrostatic discharge for sensitive environments. It is designed for medium to heavy-duty use.

2. System composition

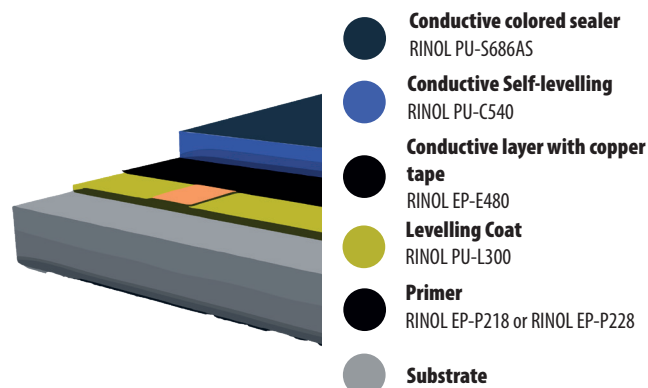

3. Areas of application

The RINOL CONDUCTIVE PU system is specifically designed to be applied in various types of industrial environments, adapting to the needs of several sectors, including:

- Explosion Proof Areas
- Operating theatres
- Clean rooms
- Power stations
- Transformers and substations
- Electronics industry
- Heliports

4. Properties

- Low odour during application
- Electrically conductive with minimal use of copper tape
- Durable and long lasting
- Smooth, easy to clean surface
- Dust free
- Jointless
- Good chemical resistance

5. Certifications


The individual products within RINOL CONDUCTIVE PU system are certified to meet high quality standards:

Synthetic resin screed material according to EN 13813:2002

Coating for surface protection of concrete according to EN 1504-2:2004

Indoor Air Comfort Gold certifies very low VOC emissions, meeting stringent worldwide indoor air quality standards such as:

AgBB: Complies with the criteria of the German Committee for Health-Related Evaluation of Building Products (AgBB), ensuring low VOC emissions and suitability for use in environments where indoor air quality is a priority, such as residential and commercial spaces.

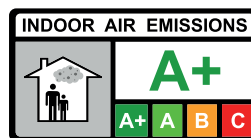

A+ French VOC Emissions: Awarded an A+ rating, demonstrating very low VOC emissions, suitable for applications focused on indoor air quality, such as schools and healthcare facilities.

BREEAM: Supports compliance with BREEAM criteria, contributing to sustainable building practices and environmental performance.

LEED: Compatible with LEED standards, helping projects earn credits for indoor environmental quality through low VOC content and durability.

6. Technical data

The RINOL CONDUCTIVE PU system provides detailed technical data, including physical and mechanical properties:

Technical Data		
1	Thickness	3 - 4 mm
2	Maximum service temperature	60 °C
3	Compressive strength (DIN EN 196 / ASTM C 109)	61 N/mm ²
4	Flexural strength (DIN EN 196 / ASTM C 190)	45 N/mm ²
5	Adhesive strength (DIN ISO 4624)	> 1,5 N/mm ²
6	Abrasion resistance (Taber CS10 wheel) (DIN 53754 / ASTM D 1044)	80 mg / 1000 cycles
7	Shore D hardness (DIN 53505 / ASTM D 2240)	60
8	Resistance to earth (DIN EN 1081)	< 1 x 10 ⁶ Ω
9	Colour stability (scale 1-8, best=8) (DIN EN ISO 877)	8
10	Slip resistance (DIN 51130)	R9 - R12

7. Chemical Resistance

The RINOL CONDUCTIVE PU floors, under ambient temperature conditions, demonstrate resistance to:

Weak mineral acids, such as hydrochloric, nitric, phosphoric, and sulfuric acids.

Alkaline substances, including sodium hydroxide up to 50% concentration.

Standard cleaning agents used for floor maintenance.

Sugars, even with repeated contacts.

Mineral oils, diesel, kerosene, and gasoline.

8. Available colours

The RINOL CONDUCTIVE PU system is available in a wide range of RAL and NCS colours, offering a broad selection to meet the aesthetic preferences of



RCR Flooring Products Italia S.r.l.

Via V. Chiarugi 76/U
I - 45100 Rovigo

Tel.: +39 (0) 425 411 200
Fax: +39 (0) 425 411 222

info.italy@rcrif.com
www.rinol.com

COMPANY WITH
MANAGEMENT SYSTEM
CERTIFIED BY DNV
ISO 9001 • ISO 14001

any project.

9. Application Instructions

9.1. Substrates

9.1.1 Suitable substrates are concrete, polymer modified concrete or screeds, anhydrite or magnesite.

9.1.2 The substrate should have a minimum tensile strength of 1.5 N/mm² and compressive strength of 25 N/mm² measured to an approved national standard.

9.1.3 The substrate should be visibly dry. For concrete and polymer modified concrete, the moisture content should not exceed 4% by weight when measured according to a recognised standard. RINOL range includes primers that can optionally be used when the static moisture content reaches 6%, measured using CM (calcium carbide) Method. For anhydrite or magnesite substrates, moisture contents up to 0.8% by weight are acceptable.

9.1.4 The substrate must be clean and free from dust and loose particles. All traces of contaminants such as oils, fats, greases, paint residues, chemicals, algae and laitance should be removed.

9.2. Preparation

9.2.1 The preferred method of surface preparation is vacuum blasting. Other methods such as scabbling, grit blasting or grinding may be used but are generally less satisfactory.

9.3. Priming

9.3.1 The primer is mixed using an electric mixer, taking care to avoid the inclusion of air. When homogeneous, the mixture is poured onto the prepared surface and spread using a Kaub spatula or rubber spreader. Material consumption is 250 - 500 g/m² depending on the roughness of the substrate.

9.3.2 Dry quartz sand (RINOL QS-20) is scattered on the wet primer at a rate of 800 - 1200 g/m² to ensure good adhesion between the coats.

9.3.3 RINOL primers must not be applied when the temperature falls or is expected to fall within 3 °C of the dew point.

9.4. Application of the levelling layer

9.4.1 The RINOL PU-L300 sealer should be applied when the primer is hardened but not completely cured. This will normally be after 12 - 15 hours.

9.4.2 Prior to the application of the sealer, remove excess silica sand and sand and vacuum clean the primer.

9.4.3 The two components of RINOL PU-L300 should be mixed using an electric mixer, taking care to avoid the inclusion of air. When the mixture is homogeneous, add a mixture of dry quartz sands (1 part RINOL QS-10, 3 parts RINOL QS-20) at a ratio of 20 parts sand to 100 parts resin and mix again until homogeneous. This mixture is then poured onto the primed surface and spread with a spatula, trowel or scraper at a rate of 800 - 1200 g/m².

9.4.4 Don't scatter the levelling layer with sand in excess.

9.4.5 RINOL PU-L300 must not be applied when the temperature falls or is expected to fall within 3 °C of the dew point.

9.5. Application of the conductive layer

9.5.1 The conductive layer RINOL EP-E480 should be applied when the levelling layer is hardened but not completely cured. This will normally be after 12 - 15 hours.

9.5.2 If required, copper tapes are fixed to the surface of the levelling layer and covered with gauze strips.

9.5.3 Mix the two components of RINOL EP-E480 using an electric mixer, taking care to avoid the inclusion of air. This mixture is then poured onto the surface of the levelling layer and spread with a rubber spatula at a rate of 70 - 90 g/m². It should then be rolled with a short pile roller.

9.5.4 RINOL EP-E480 must not be applied when the temperature falls or is expected to fall within 3 °C of the dew point.

9.6. Application of the Conductive Self levelling

9.6.1 The conductive self levelling RINOL PU-C540 should be applied when the conductive layer has a maximum residual water content of 4%. This will normally be after 12-15 hour at 23°C.

9.6.2 The two components of the conductive self levelling RINOL PU-C540 are mixed with an electric mixer, taking care to avoid the inclusion of air. When homogeneous, pour the mixture onto the surface of the conductive layer and spread with a serrated trowel. The material consumption should be 1600 - 1800 g/m². The teeth of the notched trowel must be replaced regularly to ensure uniform thickness.

9.6.3 RINOL PU-C540 must not be applied when the temperature falls or is expected to fall within 3 °C of the dew point.

9.7. Application of the sealer

9.7.1 The sealer RINOL PU-S686AS should be applied when the primer is hardened but not completely cured. This will normally be after 12 - 15 hours.

9.7.2 The two components of RINOL PU-S686AS should be mixed using an electric mixer, taking care to avoid the inclusion of air. When homogeneous, pour the mixture onto the primed surface and apply with a 10-12mm hair roller. The material consumption is approximately 80 - 100 g/m². Two layers may be necessary to obtain a good color coverage.

9.7.3 RINOL PU-S686AS must not be applied when the temperature falls or is expected to fall within 3 °C of the dew point.

9.7.4 At 20 °C RINOL CONDUCTIVE PU can be walked on after 18 - 24 hours and is fully cured after 7 days and full chemical resistant after 28 days.

10. Specification clauses for RINOL CONDUCTIVE PU

All products must be applied and cured at temperatures between 15 and 25°C and relative humidity <80%.

The primer shall be RINOL EP-P218 or RINOL EP-P228, applied at a rate of 250 - 500 g/m² to ensure complete sealing of the substrate surface.

Dry quartz sand (RINOL QS-20) shall be broadcast into the wet primer at a rate of 800 - 1200 g/m².

The levelling layer shall be RINOL PU-L300 filled with dry quartz sand at a ratio of 20 parts sand to 100 parts resin. The quartz sand shall be 1 part RINOL QS-10, 3 parts RINOL QS-20. The levelling layer shall be applied at a rate of 800 - 1200 g/m².

Copper strips, if required, are fixed to the levelling layer and covered with gauze.

The conductive layer shall be RINOL EP-E480, applied at a rate of 70 - 90 g/m². The conductive self levelling shall be RINOL PU-C540, applied at a rate of 1600 - 1800 g/m².

As a colored sealer, RINOL PU-S686AS is applied at a rate of approx. 80-100 g/m² per coat, using a medium hair roller as appropriate. .

11. Maintenance

The RINOL CONDUCTIVE PU system is easy to maintain and clean. To ensure

the system's longevity and performance, it is essential to follow the provided maintenance instructions. This may include regular cleaning with suitable products to remove dirt and residues, periodic inspection of the floor for signs of wear, and repair or replacement of damaged areas if necessary. With proper maintenance, the RINOL CONDUCTIVE PU system can provide many years of reliable service.

12. Safety

Safety is a priority at RCR Flooring Products Italia S.r.l. We provide information on safety and precautions during the application of the RINOL systems. This may include the use of personal protective equipment during application, adequate ventilation, prevention of exposure to chemicals, and proper disposal of product waste. It is important to follow all safety guidelines to ensure a safe working environment and maintain the integrity of the systems.

13. Health and Safety Measures

Consult the latest valid Material Safety Data Sheet (MSDS) for the products that are part of the system and the Chemical Industry Guidelines on the Handling of Coating Materials (M004/M023) for information on the handling of the products. Wear suitable protective clothing such as gloves and goggles during application.

Skin contact with liquid resins can cause health damage and allergies. Once cured properly, the product is not hazardous.

14. Customer Service

At RCR Flooring Products Italia S.r.l., we pride ourselves on providing exceptional customer service. Our team of experts are on hand to answer your questions, provide technical advice and help you choose the RINOL systems that best suit your needs. We also provide application information to ensure that our systems are installed correctly and deliver optimum performance.

15. Legal notice

The technical data for the Company's products and systems have been compiled with due care. However, any recommendations or suggestions made with regard to the use of these products are made without guarantee as the conditions under which they are used are beyond the control of the Company. It is the responsibility of the customer to determine whether the products are suitable for the particular application and whether the conditions of use are appropriate for the particular product. No liability can therefore be derived from the product data sheet.

Please note that only the latest version of the data sheet is valid and replaces all previous versions. The technical data given are approximate values determined by us and do not constitute a guarantee of properties. Misprints, errors, translation errors and changes reserved. Please note that the information in the system datasheets may differ in different languages/countries. For further information please visit our website at www.rinol.com.

The technical data sheet does not exempt the user from carrying out his own application tests, if necessary, within the limits of his capabilities. Please refer to the RINOL Technical Guide for information on coating options and more detailed information on the installation of RINOL products..

16. CE Marking

The individual products that make up the system are certified according to DIN EN 13813 "Screed materials and floor screeds - Screed materials - Properties and requirements" (January 2003) and EN 1504-2. These standards specify the requirements for screed mortars used in internal floor constructions. Resin coatings and sealants are also covered by these standards. Products complying with the mentioned standards must have the CE mark.